

Out-of-plane dielectric constant and insulator-superconductor transition in $\text{Bi}_2\text{Sr}_2\text{Dy}_{1-x}\text{Er}_x\text{Cu}_2\text{O}_8$ single crystals

T Takayanagi, M Kogure and I Terasaki

Department of Applied Physics, Waseda University, Tokyo 169-8555, JAPAN

(Dated: February 1, 2008)

The out-of-plane dielectric constant of the parent insulator of the high-temperature superconductor $\text{Bi}_2\text{Sr}_2\text{Dy}_{1-x}\text{Er}_x\text{Cu}_2\text{O}_8$ was measured and analysed from 80 to 300 K in the frequency range of 10^6 - 10^9 Hz. All the samples were found to show a fairly large value of 10-60, implying some kind of charge inhomogeneity in the CuO_2 plane. Considering that the superconducting sample $\text{Bi}_2\text{Sr}_2\text{Ca}_{0.75}\text{Pr}_{0.25}\text{Cu}_2\text{O}_8$ also shows a similar dielectric constant, the charge inhomogeneity plays an important role in the insulator-superconductor transition.

I. INTRODUCTION

A cuprate with a nearly undoped CuO_2 plane shows high resistivity and antiferromagnetic order at low temperature, which is called a parent insulator of high-temperature superconductors (HTSC). With doping, an insulator-metal transition (IMT) arises, and the system changes from the parent insulator to HTSC. For IMT, the dielectric constant ε is of great importance in the sense that it provides a measure of localisation length in the insulator. In particular, ε for doped Si divergingly increases with a critical exponent toward the IMT [1].

Chen *et al.* first pointed out the importance of ε for the IMT of HTSC [2]. They found that ε of $\text{La}_2\text{CuO}_{4+\delta}$ diverged only along the in-plane direction toward the IMT, and stated that the IMT of HTSC was two-dimensional. However, their study was done only for $\text{La}_2\text{CuO}_{4+\delta}$, in which a quasi-static stripe fluctuates in the CuO_2 plane [3]. Since the stripe fluctuation is a kind of charge modulation and/or a charge disproportion, it might cause a large dielectric response. Perhaps related to this, $(\text{La,Sr})_2\text{CuO}_{4+\delta}$ shows structure phase transition [4], oxygen ordering [5] and phase separation [6], which might also give a large dielectric response. Thus it is necessary to study another class of HTSC, which is far away from the stripe- or lattice-instability.

We think that $\text{Bi}_2\text{Sr}_2\text{RCu}_2\text{O}_8$ (Bi-2212) is the best candidate. This class of HTSC shows no structural phase transition below 300 K, and is expected to be away from the stripe instability. (The only exception is the Zn-doped Bi2212 of Ref.[7].) We should also note that Bi-2212 has only one equivalent Cu site, unlike the CuO chain in $\text{YBa}_2\text{Cu}_3\text{O}_7$. We have studied the charge transport of the parent insulator of Bi-2212 [8, 9, 10], and have found that their physics is as rich as the physics of HTSC themselves. In this paper, we report on measurement and analysis of the dielectric constant of $\text{Bi}_2\text{Sr}_2\text{Er}_{1-x}\text{Dy}_x\text{Cu}_2\text{O}_8$ single crystals along the out-of-plane direction.

II. EXPERIMENTAL

Single crystals of Bi-2212 were grown by self-flux method. The growth conditions and the sample characterisation were described in Ref.[8]. The prepared crystals of $\text{Bi}_2\text{Sr}_2\text{Dy}_{1-x}\text{Er}_x\text{Cu}_2\text{O}_8$ ($x=0, 0.3, 0.5, 0.7$ and 1.0) were insulating, and the doping levels of the as-grown crystals were slightly different for different x . An energy-dispersive x-ray (EDX) analysis revealed that Sr was slightly excessive, and the content was estimated to be $\text{Bi}_{2.2}\text{Sr}_{3.4-y}\text{R}_y\text{Cu}_2\text{O}_{8+\delta}$ (within an experimental error of 10%). The R content y was 1.0 for $\text{R}=\text{Dy}$ and 0.7 for $\text{R}=\text{Er}$. Thus a real composition would be something like $\text{Bi}_2\text{Sr}_2\text{DyCu}_2\text{O}_8$ and $\text{Bi}_2\text{Sr}_2(\text{Sr}_{0.3}\text{Er}_{0.7})\text{Cu}_2\text{O}_8$ for $\text{R}=\text{Dy}$ and Er , respectively. Thus a solid solution between Er and Dy gives $\text{Bi}_2\text{Sr}_2\text{Dy}_{1-x}(\text{Sr}_{0.3}\text{Er}_{0.7})_x\text{Cu}_2\text{O}_8$, which enables us to finely tune the doping level from highly insulating ($x=0$) to slightly doped level ($x=1$). Instead of the real composition, we will call the prepared samples $\text{Bi}_2\text{Sr}_2\text{Dy}_{1-x}\text{Er}_x\text{Cu}_2\text{O}_8$ as a matter of convenience. For a reference, a superconducting sample $\text{Bi}_2\text{Sr}_2\text{Ca}_{0.75}\text{Pr}_{0.25}\text{Cu}_2\text{O}_8$ ($\text{R}=\text{Ca}_{0.75}\text{Pr}_{0.25}$) was also prepared.

Figure 1(a) shows the temperature dependence of the out-of-plane resistivity for the measured samples. Reflecting that the carrier concentration increases with increasing Er content, the magnitude systematically decreases with x . For $\text{R}=\text{Ca}_{0.75}\text{Pr}_{0.25}$, the superconducting transition is observed slightly below 80 K.

We estimated the hole concentration per Cu (p) from the room-temperature thermopower [11], and found $p=0, 0.01, 0.015, 0.03$, and 0.035 for $x=0, 0.3, 0.5, 0.7$, and 1.0 , respectively. For $\text{R}=\text{Ca}_{0.75}\text{Pr}_{0.25}$, p was estimated to be 0.14 (underdoped region). The uncertainty in p was typically ± 0.005 arising from the scattered data in Ref.[11], within which the estimated p is consistent with the p estimated from the Hall coefficient.

The complex impedance of the samples in the frequency range of 10^6 - 10^9 Hz was measured with a two-probe technique using an rf LCR meter (Agilent 4287A) with a similar technique by Böhmer *et al.* [12] A low contact resistance was realized by uniformly painting the silver paste (Dupont 6838) on both sides of the c -plane surface, followed by annealing at 873 K for 30 min. The con-

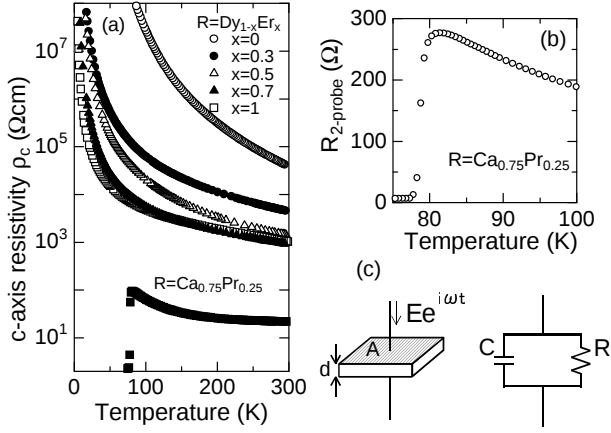


FIG. 1: (a) The out-of-plane resistivity of $\text{Bi}_2\text{Sr}_2\text{RCu}_2\text{O}_8$ ($R=\text{Dy}_{1-x}\text{Er}_x$ and $\text{Ca}_{0.75}\text{Pr}_{0.25}$) measured using a two-probe technique, (b) The two-probe resistance ($R_{2\text{-probe}}$) for a superconducting sample $\text{Bi}_2\text{Sr}_2\text{Ca}_{0.75}\text{Pr}_{0.25}\text{Cu}_2\text{O}_8$, and (c) a schematic drawing for the complex impedance measurement.

tact resistance was 1-2 Ω , which can be safely neglected by comparison with the sample resistance (typically 100 Ω). In order to make the sample resistance high, we cut the sample along the a and b directions as small as possible. For the most conducting sample of $R=\text{Ca}_{0.75}\text{Pr}_{0.25}$, the dimension was $0.2 \times 0.2 \times 0.05 \text{ mm}^3$. Figure 1(b) shows a typical two-probe resistance for $R=\text{Ca}_{0.75}\text{Pr}_{0.25}$. Since the sample is superconducting, the resistivity rapidly decreases below 80 K, and the residual resistance is 6.6 Ω that is the sum of the contact resistance and the probe resistance ($\sim 5\Omega$). The sample resistance is 280 Ω at 80 K, which indicates the contribution of the contact resistance is less than 1 %.

As schematically shown in figure 1(c), the measured impedance was understood as a parallel circuit consisting of a resistance $R(\omega)$ and a capacitance $C(\omega)$ which can be dependent on frequency $\omega = 2\pi f$. Then the complex impedance Z is written as

$$Z = \frac{R}{1 + i\omega CR} = \frac{R}{1 + (\omega CR)^2} - i \frac{\omega CR^2}{1 + (\omega CR)^2} \quad (1)$$

Since the capacitance is expressed in terms of the dielectric constant ϵ as $C = \epsilon_0 \epsilon A/d$, ϵ is obtained from the complex impedance as

$$\epsilon = - \frac{d}{\omega \epsilon_0 A} \frac{\text{Im}Z}{|Z|^2} \quad (2)$$

where A and d are the area and the distance of the capacitor, and ϵ_0 is the dielectric constant of vacuum.

III. RESULTS

Figure 2 shows the out-of-plane dielectric constant (ϵ_c). The magnitude of ϵ_c reaches a fairly large value

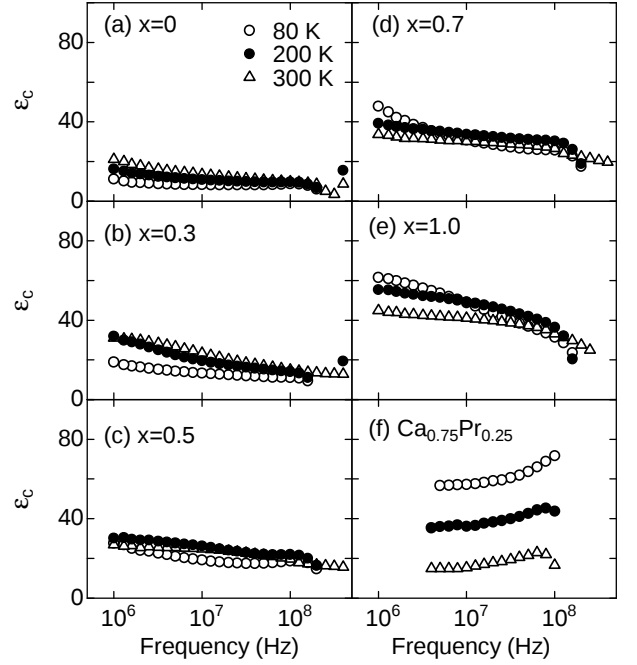


FIG. 2: The out-of-plane dielectric constants (ϵ_c) of $\text{Bi}_2\text{Sr}_2\text{RCu}_2\text{O}_8$ ($R=\text{Dy}_{1-x}\text{Er}_x$ and $\text{Ca}_{0.75}\text{Pr}_{0.25}$).

of 10-60. Previously we found that the frequency dependence of ϵ_c for $x=0$ is explained with the Debye model of dielectric relaxation [13, 14]. Although the relaxation behaviour may not be clearly seen in figure 2, ϵ_c decreases with increasing frequency. Sekhar *et al.* [15] measured ϵ of the polycrystalline samples of $\text{Bi}_2\text{Sr}_2\text{RCu}_2\text{O}_8$ ($R=\text{Sm}$ and Y), and found that ϵ is as large as 10^4 at 300 K, and shows a relaxation behaviour. Lunkenheimer *et al.* [16] measured anisotropic dielectric constant of single-crystal La_2CuO_4 , and found the relaxation behaviour along the c -axis direction. For other parent insulators, Shi [17] measured ϵ of polycrystalline samples of $(\text{La}, \text{Gd})_2\text{CuO}_4$, and Mazzara *et al.* [18] measured ϵ_c of single-crystal $\text{PrBa}_2\text{Cu}_3\text{O}_7$. These materials also show a large ϵ with a relaxation behaviour, and we conclude that this is generic in the parent insulator of HTSC.

It is quite difficult to accurately measure ϵ_c for a superconducting sample. An upturn above 10^7 Hz for $R=\text{Ca}_{0.75}\text{Pr}_{0.25}$ is an artifact due to an inductance contribution from the leads because of the small sample resistivity, and an intrinsic dielectric response is likely to be independent of frequency. The low-frequency data is also difficult to measure. Equation (1) requires that ωCR^2 should be in the measurable range of the analyser (typically larger than 1 Ω) but ωCR^2 for $R=\text{Ca}_{0.75}\text{Pr}_{0.25}$ was too small near 10^6 Hz . A similar situation happened in the samples of $x=0.7$ and 1 below 10^6 Hz , where we failed to measure ϵ_c .

An important finding is that ϵ_c remains positive even in the superconducting sample of $R=\text{Ca}_{0.75}\text{Pr}_{0.25}$. Kitano *et al.* [19] reported nearly the same ϵ_c of

$\text{Bi}_2\text{Sr}_2\text{CaCu}_2\text{O}_8$ (40 at 100 K at 10 GHz). This implies no divergence of ε_c at IMT, as Chen *et al.* [2] suggested previously. We further note that the out-of-plane charge response is not Drude-like, in the sense that ε is negative below the plasma frequency in the Drude model.

IV. DISCUSSION

Let us discuss the magnitude and the frequency dependence of ε_c . First, the large ε_c is not due to phonons or lattice instability, and should be attributed to an electronic excitation. Unlike La_2CuO_4 , Bi-2212 is chemically stable and shows no structure phase transition. Second the electronic excitation should be in the CuO_2 plane. We measured ε_c for the layered cobaltate Bi-Sr-Co-O that has a similar Bi_2O_2 layer, and found a small ε_c with essentially no relaxation behaviour [20]. This indicates that neither the other block layers nor the layered structure can be an origin for the large ε_c .

Let us consider the electronic excitation through a simple Lorentz model written as

$$\varepsilon(\omega) = \varepsilon_\infty + \frac{f}{\omega_0^2 - \omega^2 + i\gamma\omega} \quad (3)$$

where f , ω_0 , γ are the oscillator strength, the resonance frequency, and the damping rate, respectively. For an overdamped case $\gamma \gg \omega_0$, Equation (3) reduces to the Debye model of dielectric relaxation in the low frequency limit $\omega_0 \gg \omega$ as

$$\varepsilon(\omega) = \varepsilon_\infty + \frac{f}{\omega_0^2} \frac{1}{1 + i\omega\tau} \quad (4)$$

where $\tau = \gamma/\omega_0^2$. Accordingly a large ε implies a small ω_0 accompanied by a large f . We can demonstrate that ε is small for a simple band insulator, where ω_0 and f correspond to the band gap and the Drude weight of the valence electron. Since these two are of the same order, the second term of Equation (4) gives of the order of unity for $\omega \rightarrow 0$. Note that ε is also small for a Mott insulator, because the Mott-Hubbard gap is of the same order as the band gap. In other words, a single-particle gap is too large to give a large ε .

A collective-excitation gap is most likely to be responsible for a large ε . It is known that the charge-density-wave (or charge-ordered) materials, such as $\text{K}_{0.3}\text{MoO}_3$ [21], LuFe_2O_4 [22], $(\text{Pr},\text{Ca})\text{MnO}_3$ [23] exhibit a large ε with relaxation behaviour, where ω_0 is the pinning frequency of the charge density. This implies that a charge density modulation or a charge fluctuation exists in the CuO_2 plane, which in principle can occur in the doped antiferromagnet. Unlike the case of a doped semiconductor, holes in the parent insulator do not distribute uniformly. They tend to condense in order that they should minimise the exchange-energy loss of the antiferromagnetic background. Prime examples are the charge stripe [3] and the phase separation [24]. Thus we think that the

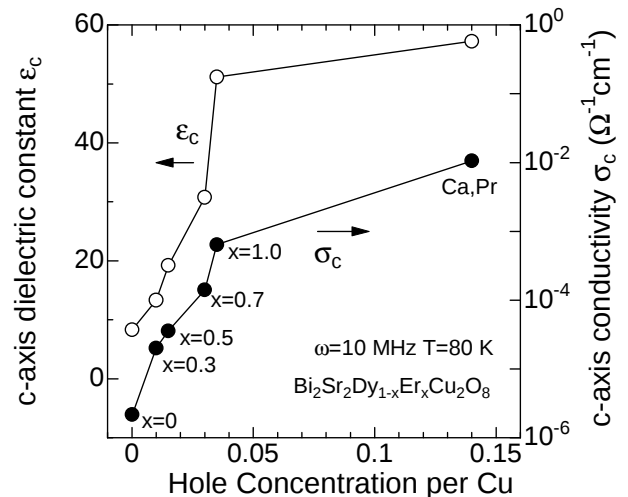


FIG. 3: The out-of-plane dielectric constant and conductivity $\text{Bi}_2\text{Sr}_2\text{RCu}_2\text{O}_8$ at 10 MHz plotted as a function of hole concentration per Cu (p). The p was estimated by measuring the room-temperature thermopower.

observed dielectric response is a piece of evidence for the charge modulation in the parent insulator.

Recent scanning tunnel microscope/spectroscopy has revealed unexpected inhomogeneous electronic states of HTSC. Pan *et al.* [25] found that the local density of states are inhomogeneous in the CuO_2 plane of the optimally doped Bi-2212, where the doped carriers form a metallic patch. Very recently Howald *et al.* [26] also found superconducting and non-superconducting phases (at a nanometer scale) coexist in the CuO_2 plane of the underdoped Bi-2212. This type of charge inhomogeneity could cause large ε , and is consistent with our observations.

Next let us discuss the carrier concentration dependence. In figure 3, ε_c and the out-of-plane conductivity σ_c for a representative frequency of 10^7 Hz at 80 K are plotted as a function of p . Most importantly, finite values of ε_c and σ_c are observed simultaneously. This contrasts strikingly with a case of a doped semiconductor, in which the insulating region is characterised by a finite ε and $\sigma = 0$ [1], whereas the metallic region is characterised by a finite σ and $\varepsilon = 0$ [27]. The p dependence in figure 3 suggests that the parent insulator is a mixture of an insulating and metallic phases. The increase of σ_c with p suggests that carrier-doping makes locally metallic patches in the insulating background. The patches cause a large ε_c by fluctuating its position and a finite σ_c through the proximity effects. Then the charge dynamics can be understood in terms of a percolative mixture of the insulating and metallic phases. Accordingly the insulator-superconductor transition in Bi-2212 occurs, when the metallic (superconducting) patches are connected with one another over a whole sample with proximity effects.

Now we will consider the anisotropy of ε . Based on the inhomogeneity scenario, ε is enhanced to be $\varepsilon_\infty + f/\omega_0^2$ for $\omega \rightarrow 0$, where f is the Drude weight of the metallic patch that is inversely proportional to the effective mass. It is therefore expected that ε_{ab} is larger by the effective-mass ratio (10^4) than ε_c , whereas the frequency and temperature dependences are nearly identical. This is what we observed in the preliminary measurements for ε_{ab} of R=Dy and Er [14]. In a superconducting sample, the metallic patches are connected from edge to edge, and the carriers can move freely along the in-plane direction. For Bi-2212, carriers near the cold spot ($\pi/2, \pi/2$) dominates the in-plane transport [28], and are little affected by the inhomogeneity, because the local density of states is rather homogeneous along the ($\pi/2, \pi/2$) (nodal) direction [25]. This means that a Drude-like charge response can occur along the in-plane direction. Then ε_{ab} changes with doping from positive to negative across the IMT, at which the divergence of ε_{ab} would be seen. On the other hand, owing to the zero matrix element [29], carriers near ($\pi/2, \pi/2$) cannot move along the out-of-plane direction, and consequently cannot screen the inhomogeneity in the CuO_2 plane. This is the reason the dielectric response along the out-of-plane direction remains unchanged at IMT.

Finally we will compare our results with those by Chen *et al.* [2] At a qualitative level, our observations are similar to theirs: (1) ε_c increases with decreasing frequency, and (2) ε_c does not diverge at IMT. However our measurement are free from the lattice instability, and includes the data for a superconductor, from which we have successfully shown that the items (1)(2) are generic for HTSC. Another discrepancy is that we understood the frequency dependence as the dielectric relaxation, while they employed the variable range hopping. Considering ϵ of other parent insulators, we think that the relaxation behaviour is generic. Perhaps this comes from the different temperatures measured. They discussed ε at 4 K, where the resistivity is also described in terms of variable range hopping. We found that the resistivity anisotropy is strongly dependent on temperature [8]. The resistivity is almost isotropic at 4 K, and the parent insulator be-

haves three-dimensional. On the contrary, the resistivity is largely anisotropic above 80 K, and in particular the “confinement” is observed even in the parent insulator. Thus it would be natural that the frequency dependence of ε is different between theirs and ours.

V. SUMMARY

We prepared single crystals of $\text{Bi}_2\text{Sr}_2\text{Dy}_{1-x}\text{Er}_x\text{Cu}_2\text{O}_8$, and measured the out-of-plane dielectric constants in the temperature range of 80-300 K and in the frequency range of 10^6 - 10^9 Hz. The dielectric constant of the parent insulator is characterised by the large magnitude and relaxation behaviour, which would come from the charge inhomogeneity recently observed in the scanning tunnel microscope experiments. The doping dependence of the dielectric constant and the conductivity suggests that the charge dynamics is understood as a percolation of the insulating and metallic phases, and that the insulator-superconductor transition happens when the metallic (superconducting) patches are connected with one another over a whole sample.

Acknowledgements

The authors would like to thank S Tajima, K Yoshida and S Tanaka for the technical support of rf impedance measurement. They also appreciate T Sugaya and T Mizuno for the preparation of the single crystals and the measurement of the thermopower, and T Kitajima for collaboration at the early stage of the present study. This work is partially supported by The Kawakami Memorial Foundation, and Waseda University Grant for Special Research Projects (99A-556).

References

-
- [1] Castner T G, Lee N K, Cieloszyk G S and Salinger G L 1975 *Phys. Rev. Lett.* **34** 1627
 - [2] Chen C Y, Preyer N W, Picone P J, Kastner M A, Jenssen H P, Gabbe D R, Cassanho A and Birgeneau R J 1989 *Phys. Rev. Lett.* **63** 2307
 - [3] For a recent review, see Emery V J, Kivelson S A and Tranquada J M 1999 *Proc. Natl. Acad. Sci. USA* **96** 8814 (cond-mat/9907228) and references therein
 - [4] Takagi H, Cava R J, Marezio M, Batlogg B, Krajewski J J, Peck, Jr. W F, Bordet P and Cox D E 1992 *Phys. Rev. Lett.* **68** 3777
 - [5] Yu J D, Inaguma Y, Itoh M, Oguni M and Kyomen T 1996 *Phys. Rev B* **54** 7455.
 - [6] Cho J H, Chou F C and Johnston D C 1993 *Phys. Rev. Lett.* **70** 222
 - [7] Akoshima M, Noji T, Ono Y and Koike Y 1998 *Phys. Rev B* **57** 7491
 - [8] Kitajima T, Takayanagi T, Takemura T and Terasaki I 1999 *J. Phys. Condens. Matter* **11** 3169
 - [9] Terasaki I, Takemura T, Takayanagi T, Kitajima T 2000 in “Advances in Superconductivity XII” (Springer) p.53, *Proc. of the 12th International Symposium on Superconductivity (ISS '99)*, October 17-19, 1999, Morioka (cond-mat/9911153)
 - [10] Takemura T, Kitajima T, Sugaya T and Terasaki I 2000 *J. Phys. Condens. Matter* **12** (2000) 6199.

- [11] Obertelli S D, Cooper J R and Tallon J L 1992 **Phys. Rev. B** **46** 14928
- [12] Böhmer R, Maglione M, Lunkenheimer P and Loidl A 1989 *J. Appl. Phys.* **65** 901
- [13] Kitajima T, Takayanagi T and Terasaki I Meeting Abstracts of the Physical Society of Japan **54**, Issue 2, p. 584 (1999) (in Japanese)
- [14] Takayanagi T, Kitajima T, Takemura T and Terasaki I 2000 in “Advances in Superconductivity XII” (Springer) p.203, Proc. of the 12th International Symposium on Superconductivity (ISS '99), October 17-19, 1999, Morioka (cond-mat/9911156)
- [15] Sekhar M C, Krishna B G, Kumar M M, and Suryanarayana S V 1996 *Mod. Phys. Lett. B* **10** 1365; 1997 *Mod. Phys. Lett. B* **11** 727
- [16] Lunkenheimer P, Resch M, Loidl A and Hidaka Y 1992 *Phys. Rev. Lett.* **69** 498
- [17] Shi J B 1998 *Physica C* **305** 35
- [18] Mazzara G P, Skirius S, Cao G, Chern G, Clark R J, Crow J E, Mathias H, O'Reilly J W, and Testardi L R 1993 *Phys. Rev. B* **47** 8119
- [19] Kitano H, Hanaguri T and Maeda A 1998 *Phys. Rev. B* **57** 10946
- [20] Terasaki I, Takayanagi T, Kogure M and Mizuno T 2001 *Physica C* **357-360** 96
- [21] Cava R J, Fleming R M, Littlewood P, Rietman E A, Schneemeyer L F and Dunn R G, 1984 *Phys. Rev. B* **30** 3228
- [22] Ikeda N, Kohn K, Myouga N, Takahashi E, Kitoh H, and Takekawa S 2000 *J. Phys. Soc. Jpn.* 1526.
- [23] Yamada S, Arima T and Takita K, 1999 *J. Phys. Soc. Jpn.* **68** 3701.
- [24] Maekawa S and Tohyama T 2001 *Rep. Prog. Phys.* **64** 383 and references therein
- [25] Pan S H, O'Neal J P, Badzey R, Chamon C, Ding H, Engelbrecht J R, Wang Z, Eisaki H, Uchida S, Gupta A K, Ng K W, Hudson E W, Lang K M, and Davis J C 2001 cond-mat/0107347
- [26] Howald C, Fournier P and Kapitulnik A 2001 cond-mat/0101251
- [27] Rosenbaum T F, Andres K, Thomas G A and Bhatt R N 1980 *Phys. Rev. Lett.* **45** 1723.
- [28] Ioffe L B and Millis A J 1998 *Phys. Rev. B* **58** 11631
- [29] Andersen O K, Lichtenstein A I, Jepsen O and Paulsen F 1995 *J. Phys. Chem. Solids* **56** 1573